

 **TRACTIO**
DECKING'S NEW POWERHOUSE



Groundbreaking strength, seamless style

A trailblazer in decking, Tractio's breakthrough technology delivers strength and stability like never before. Enjoy the beautiful, streamlined look of a modern timber deck - with the lasting confidence that comes with powerhouse materials and manufacturing.

Incredibly tough, lightweight and durable, the polypropylene decking is unlike other decking material on the market. Made with patented Eovations technology, it provides one of the industry's best strength-to-weight ratio, is water resistant, and has virtually no thermal expansion or contraction.

This all adds up to low-maintenance performance that's ideal for any conditions, particularly wet areas. It combines beautiful timber looks with materials that won't splinter, sag, crack, fade or stain - unlike other composites.

Since its creation, Eovations technology has perfected the substrate found in Tractio decking. This process starts with a mixture of polypropylene and calcium carbonate that's pull extruded for cavitation. Cavitation creates tiny air pockets that keep the boards lightweight, but with a fibre-like structure similar to other composites - giving it unmatched strength.

Tractio deck boards can be installed in wet areas such as bridges, boardwalks, boat docks, and pool decks. It is weather-resistant and provides superior UV protection.


Easy to handle and install, Tractio also has stylish side-benefits. While consistent spacing between boards is recommended to allow water runoff, the absence of thermal expansion or contraction means that end gapping isn't an issue - providing a clean, seamless finish when installed.

Available in a number of colour options, Tractio is elegant and contemporary - with the versatility to invigorate any outdoor or entertaining space.




PROFILES


TRACTIO DECKING




Tractio Slotted Board
PR-TEDK-COM-140x22-C-SLT




Tractio Slotted Board
PR-TEDK-COMv-184x22-C-SLT



Tractio Solid Board
PR-TEDK-COM-140x22-C-SLD



Tractio Solid Board
PR-TEDK-COM-184x22-C-SLT

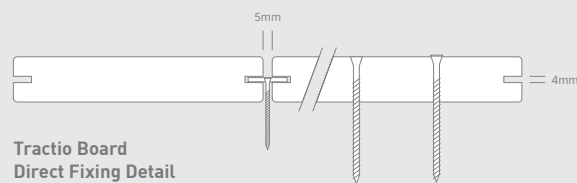

Tractio Board
Direct Fixing Detail
PR-TEDK-COM-140x22-C-SLT

 Download the latest CAD files from the product section of modinex.com.au

TRACTIO DECKING

Profile Code	Profile Width (mm)	Cover (mm)	Thickness (mm)	Profile Length (mm)	Max Spans (mm)	Linear metre per m ²	Weight per m ²
PR-TEDK-COM-140X22-MSQ-C-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-DSK-C-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-HIC-C-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-MSQ-C-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-DSK-C-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-HIC-C-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-DSD-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-WTH-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-AGY-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-FBR-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-CRD-SLT	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-DSD-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-WTH-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-AGY-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-FBR-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-140X22-CRD-SLD	140	140	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-DSD-SLT	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-WTH-SLT	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-AGY-SLT	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-FBR-SLT	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-CRD-SLT	184	184	22	5800	400	6.9m	15.8kg

TRACTIO DECKING

Profile Code	Profile Width (mm)	Cover (mm)	Thickness (mm)	Profile Length (mm)	Max Spans (mm)	Linear metre per m ²	Weight per m ²
PR-TEDK-COM-184X22-DSD-SLD	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-WTH-SLD	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-AGY-SLD	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-FBR-SLD	184	184	22	5800	400	6.9m	15.8kg
PR-TEDK-COM-184X22-CRD-SLD	184	184	22	5800	400	6.9m	15.8kg

COLOURS - STANDARD COLOUR OPTIONS



Dusk



Hickory



Mesquite



Mesquite




Mesquite

COLOURS - ENHANCED COLOUR OPTIONS



Alpine Grey



Charred




Desert Sand



Forest Brown



Weathered

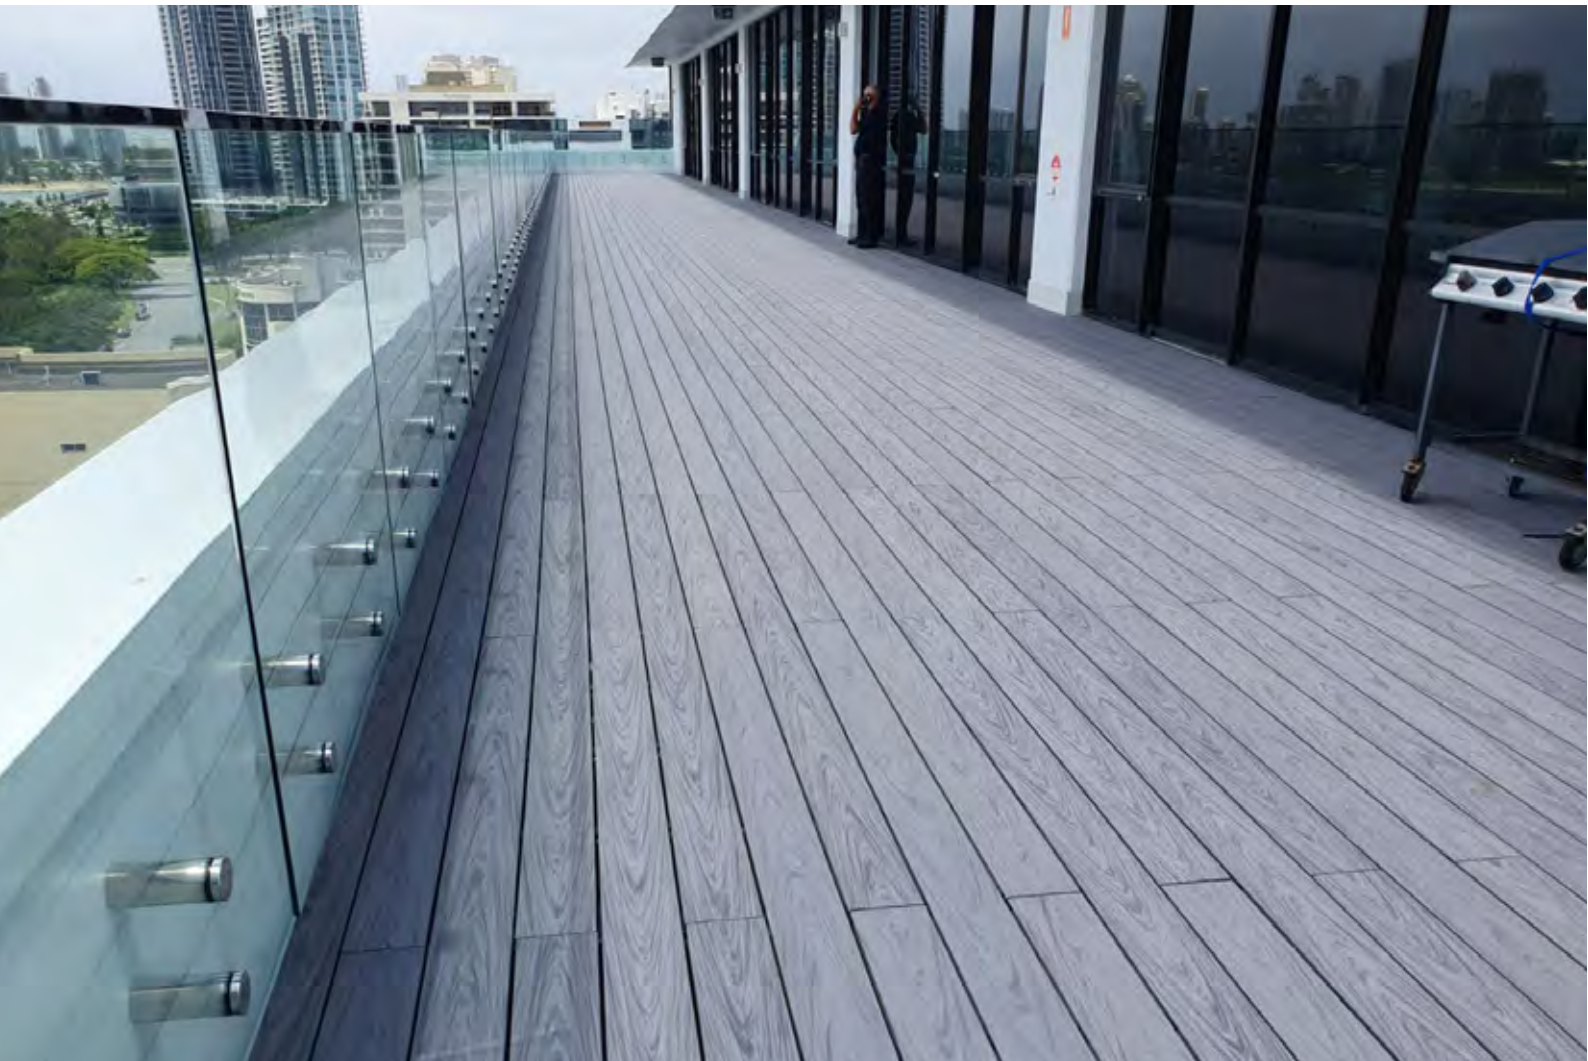

Profiles



Lasting looks, unprecedented strength, simplicity and longevity, Tractio Decking is perfect for:

- External Ramps including sloping driveways
- Wet/pool areas
- Heavy traffic areas*
- Unsheltered areas
- Domestic and commercial areas*
- Hotel/bistro areas*
- Harsh environments

Ground-breaking benefits:



Diverse Look

Two profile option, slotted-edge decking gives a clean, fastener-free appearance, while the solid-edge profile is ideal when board edges are visible



Unique Design

Patented technology delivers the industry's best strength-to-weight ratio making it a smart alternative to other composites



Durable

Robust stability that other thermoplastic deck boards can't match while being lightweight and easy to handle



Slip Resistant

Pedestrian Surface Materials AS 4586-2013 Appendix A (Wet Pendulum Test) Class: P4



Easy to Install

Lightweight and easy to handle. No ongoing maintenance worries or need to apply weather protectants or water seal products



Exterior Application

Moisture and weather resistant. No need to apply weather protectants or water seal products



Stain and Fade Resistant

Durable polymer cap stock is resistant to staining or fading

Further product information and downloads for Tractio Decking are available at modinex.com.au



Installation Instructions



Product Care



CAD files



Technical Information



Visit Tractio Product page for more information



Like what you see?

Get in touch and order your free sample today!

Phone 1800 156 455 Email hello@modinex.com.au

For further product information and downloads Visit modinex.com.au

July 2022 Publication

modinexGROUP
LEADING EDGE ARCHITECTURAL